

# VP83F Camera-Mount Shotgun Microphone with Integrated Flash Recording



The Shure VP83F LensHopper™ is a compact, condenser shotgun microphone with detailed, high-definition audio and integrated flash recording/playback capabilities for use with DSLR cameras and camcorders. Integrated flash recording/playback (MicroSDHC) enables WAV file capture at 24-bit/48kHz sampling rate, while the intuitive menu and one-button recording make it fast and easy to use in almost any environment.

## Features

- Detailed high-definition audio with full low-end response
- Supercardioid/lobar polar pattern rejects unwanted off-axis audio
- Integrated digital flash recording (MicroSDHC, up to 32 GB)
- Uncompressed WAV file capture at 24-bit/48 kHz sampling rate
- Dedicated headphone audio output for real-time headphone monitoring
- Fully adjustable user gain (up to 60 dB in 1 dB increments)
- Intuitive menu and controls
- Integrated Lyre® shock mounting system
- 10 hours of battery life (while in record mode) from 2 AA alkaline batteries (included)
- Standard size shoe mount with ¼" threaded base
- Durable all-metal construction with superior RF immunity

## Available Models

VP83F	VP83F Camera-Mount Shotgun Microphone + Integrated Flash Recording (2 AA alkaline batteries included)
-------	---


## Specifications

Type	Electret Condenser
Frequency Response	50 Hz to 20 kHz
Recording Format	WAV, 24-bit, 48 kHz Sampling Rate
Polar Pattern	Supercardioid / Lobar
Camera Output Impedance	47 Ω
Headphone Output Impedance	5 Ω
Sensitivity	0 dB Gain: -35.8 dBV/Pa <sup>(1)</sup> (16.2 mV) +30 dB Gain: -5.8 dBV/Pa <sup>(1)</sup> (512.9 mV)
Maximum SPL	129 dB SPL
1 kHz at 1% THD	
Signal-to-Noise Ratio <sup>(3)</sup>	78 dB
0 dB Gain Setting, 1 kHz at 1% THD 1000 (ohm symbol) load	
Self Noise	15.6 dB SPL-A
equivalent SPL, A-weighted, typical +30 dB Gain Setting	
Operating Temperature Range	-18°C (0°F) to 60°C (145°F)
Storage Temperature Range	-29°C (-20°F) to 74°C (165°F)
Operating Relative Humidity	0 to 95%
Housing	Cast aluminum
Power Requirements	2 AA batteries (Alkaline, NiMH, Rechargeable Li-Ion)
Camera Connector Type	3.5 mm (1/8") dual mono, unbalanced
Headphone Connector Type	3.5 mm (1/8") dual mono
Battery Life	10 hours (record mode) from 2 AA alkaline batteries
Net Weight	215 g (7.6 oz)


## Optional Accessories

A83-FUR	Fur Windjammer® for VP83 and VP83F	A83W	Foam Windscreen for VP83 and VP83F
---------	------------------------------------	------	------------------------------------

Polar Pattern

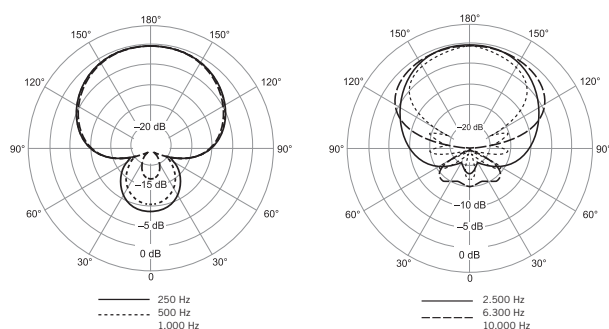

Frequency Response

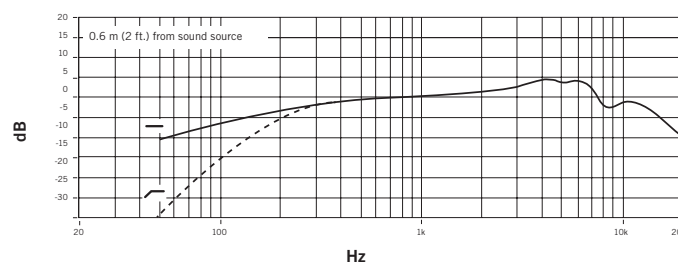

**SHURE**  
LEGENDARY  
PERFORMANCE™

**Europe, Middle East, Africa:**  
Shure Europe GmbH  
Jakob-Dieffenbacher-Str. 12  
75031 Eppingen, Germany

Phone: 49-7262-92490  
Fax: 49-7262-9249114  
Email: info@shure.de

**United Kingdom, Ireland:**  
Shure Distribution UK  
Unit 2 The I O Centre  
Lea Road  
Waltham Abbey EN9 1AS  
United Kingdom

Phone: +44 (0) 1992 703058  
Fax: +44 (0) 1992 703057  
Email: info@shuredistribution.co.uk  
www.shure.co.uk